


## Cisco SPA5 Series Setup Guide

To configure an SPA525G to your Montec Connect account, first retrieve the IP Address so that you can log into the 'Web Configuration' via your computer. To do this, simply navigate through the menu to Network Status (Menu, Status, Network Status). Enter The IP Address into your web browser.

Once you are in the Web Configuration click on 'Admin Login' and then 'Advanced'.

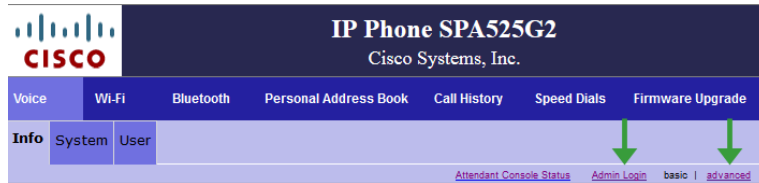

Across the top of the web browser, navigate to the 'Ext 1'. Here you will place your Extension information and the SIP Server (*sip.monconnect.com.au* for Residential and Sip Trunk accounts, and *pbx.monconnect.com.au* for Hosted PBX accounts) as the bellow screenshot shows:

Once you have saved the settings, you can refresh the 'Extensions' page of your Montec Connect Portal, to see if the device has registered. If you are still having issues, please give us a call on 1300 011 585.

<b>Share Line Appearance</b>		
Share Ext:	private	Shared User ID:
Subscription Expires:	120	Restrict MWI:
<b>NAT Settings</b>		
NAT Mapping Enable:	no	NAT Keep Alive Enable:
NAT Keep Alive Msg:	\$NOTIFY	NAT Keep Alive Dest:
<b>Network Settings</b>		
SIP TOS/DiffServ Value:	0x68	SIP CoS Value:
RTP TOS/DiffServ Value:	0xb8	RTP CoS Value:
Network Jitter Level:	high	Jitter Buffer Adjustment:
<b>SIP Settings</b>		
SIP Transport:	UDP	SIP Port:
SIP 100REL Enable:	no	EXT SIP Port:
Auth Resync-Reboot:	yes	SIP Proxy-Require:
SIP Remote-Party-ID:	no	Referor Bye Delay:
Refer-To Target Contact:	no	Referee Bye Delay:
SIP Debug Option:	none	Refer Target Bye Delay:
Sticky 183:	no	Auth INVITE:
Ntly Refer On 1xx-To-Inv:	yes	Use Anonymous With RPID:
Set G729 annexb:	none	Voice Quality Report Address:
<b>Call Feature Settings</b>		
Blind Attn-Xfer Enable:	no	MOH Server:
Message Waiting:	no	Auth Page:
Default Ring:	2	Auth Page Realm:
Conference Bridge URL:		Auth Page Password:
Mailbox ID:		Voice Mail Server:
Voice Mail Subscribe Interval:	86400	State Agent:
CFWD Notify Serv:	no	CFWD Notifier:
Broadsoft ACD:	no	Auto Ans Page On Active Call:
Feature Key Sync:	no	
<b>Proxy and Registration</b>		
Proxy:	pbx.monconnect.com.au	
Outbound Proxy:		
Alternate Proxy:		
Alternate Outbound Proxy:		
Use Outbound Proxy:	no	Use OB Proxy In Dialog:
Register:	yes	Make Call Without Reg:
Register Expires:	120	Ans Call Without Reg:
Use DNS SRV:	no	DNS SRV Auto Prefix:
Proxy Fallback Intvl:	3600	Proxy Redundancy Method:
Dual Registration:	no	
<b>Subscriber Information</b>		
Display Name:	Extension Number	User ID:
Password:	Extension Password	Use Auth ID:
Auth ID:	Extension Number	Reversed Auth Realm:
Mini Certificate:		
SRTP Private Key:		